



# Automotive Structural Adhesives

## Scotch-Grip™ Fastener Adhesives 2353, 4844 (Normal Temp Formula)

Data Sheet

August 2004

Supersedes Data Sheet Dated June 2000

### General Description



3M™ Scotch-Grip™ Fastener Adhesives are microencapsulated, room-temperature-curing adhesives which enhance the anchorage of threaded fasteners. The adhesives are designed to be coated on the fasteners and dried; they remain dormant until the shearing action of engaging the fastener into a nut or threaded cavity breaks the capsules and allows the adhesive to cure. Typical applications are fasteners for the engine compartment or safety-related parts.

Product Features	Performance Advantages	Customer Benefits
Epoxy chemistry	High torque values on coated fasteners  Environmental resistance (to heat, automotive fluids, vibration, thermal and mechanical shock)	Robust, structural bonding performance
2-part (microencapsulated)	Extended shelf life (bulk adhesive and coated fasteners)  Controlled reactivity (adhesive activates and cures upon insertion)  Reusability (additional capsules break with each re-insertion)	Convenient handling by the end-users
Flow coatable formula	Allows controlled application to fasteners; viscosity can be adjusted to achieve target coating weights  Penetrates oil coatings  Fast drying  Bonds to a broad range of fastener finishes	Broad handling, dispensing and drying windows for the applicators

# Data Sheet 2353/4844

Page 2

---

<b>Product Descriptions</b>	2353 (blue) 4844 (yellow)	<b>Normal Temp Formula.</b> Designed for applications where the service temperature will not exceed 116°C (240°F)*.
	2510 (orange) 2510N (neutral)	<b>High Temp Formula.</b> Designed for applications where the service temperature might reach continuously up to 149°C (300°F), or intermittently up to 204°C (400°F). Refer to separate data page.

*\* While the functional service temperature upper limit for 2353/4844 is 116°C (240°F) the product can be exposed to temperatures as high as 177°C (350°F). At the higher temperatures there will be loss of adhesion but no damage to the adhesive. When temperature is lowered again, adhesion will be regained.*

---

<b>Physical Properties</b>	<b>Bulk adhesive</b>	<b>2353/4844</b>
	Density	1030 kg/m <sup>3</sup> (8.6 lbs/gallon)
	% solids	59%
	Viscosity <sup>1</sup>	1600-2400 cps
	Solvent base	Toluene

<sup>1</sup>Brookfield viscometer, RVF #4 spindle at 20 rpm.

---

<b>Handling/Process Properties</b>	<b>Bulk adhesive</b>	<b>2353/4844</b>
	Container sizes	18.9 liter (5 gallon) pails
	Shelf life	Six months from date of receipt by customer  Shelf life can be extended by re-mixing the adhesive regularly so that capsules do not coagulate on the bottom of the pails. Adhesive which is more than 6 months from the date of receipt should be checked for performance prior to application on fasteners.

---

Storage conditions	Store pails at 4°-38°C (40°- 100°F)  <b>PROTECT FROM FREEZING;</b> storage below 0°C (32°F) for extended periods will freeze the adhesive and make it totally unusable. Storage above 49°C (120°F) will shorten the shelf life of the adhesive. Inventory should be rotated on a FIFO (first-in, first-out) basis.
--------------------	--

---

<b>Coated fasteners</b>	
Shelf life	One year from date of adhesive application  Shelf life can be as long as four years, depending on the storage conditions. Fasteners which are more than one year from the date of adhesive application should be checked for performance prior to use.

---

Storage conditions	Store coated fasteners at 4°-38°C (40°- 100°F).
--------------------	---

**Performance Properties**

**Prevailing In Torque (PIT)**

2353/4844

initial<sup>1</sup>

1 ft-lb (1.4 Nm)

**Break-Loose Torque (BLT)**

initial<sup>1</sup>

41 ft-lbs (55.8 Nm)

**Break-Away Torque (BAT)**

initial <sup>1</sup>	14 ft-lbs (19.0 Nm)
heat aging <sup>2</sup>	No change (±10% of initial value)
cycles <sup>3</sup>	No change (±10% of initial value)
water immersion <sup>4</sup>	No change (±10% of initial value)
gasoline immersion <sup>5</sup>	No change (±10% of initial value)
hot motor oil immersion <sup>6</sup>	No change (±10% of initial value)
transmission fluid immersion <sup>7</sup>	No change (±10% of initial value)
anti-freeze immersion <sup>8</sup>	No change (±10% of initial value)

**Prevailing Out Torque (POT)**

initial<sup>1</sup>

11 ft-lbs (15.0 Nm)

**NOTE:** These properties are representative of the products' performance, and are supported by laboratory test data. However, the values reported are not intended to be used for specification purposes. All testing, unless otherwise stated, was performed on 3/8" x 16" plain steel bolts with matching plain steel nuts.

<sup>1</sup> 24 hours at room temperature

<sup>2</sup> 3 weeks at 104°C (220°F)

<sup>3</sup> Conditioned under 3 of the following cycles: 1 1/2 hours at -56°C (-68°F), 1 hour at 177°C (350°F), and 1 1/2 hours at 24°C (75°F)

<sup>4</sup> Immersion in distilled water for 1 week at 24°C (75°F)


<sup>5</sup> Immersion in regular, unleaded gasoline for 1 week at 24°C (75°F)

<sup>6</sup> Immersion in SAE 30 motor oil for 1 week at 24°C (75°F)


<sup>7</sup> Immersion in transmission fluid for 1 week at 24°C (75°F)

<sup>8</sup> Immersion in a 50% solution of ethylene glycol in water for 1 week at 49°C (120°F)

Break-Away Torque (initial) vs Adhesive Coating Weight

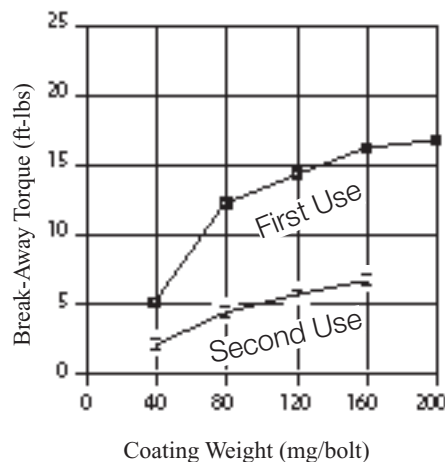

Break-Away Torque vs Cure Time (at room temperature)

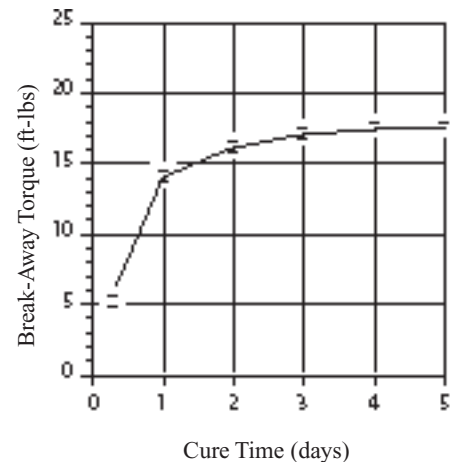

## Definition of Terms

*Prevailing In Torque (PIT):* The maximum torque reading obtained during insertion of a bolt into a nut prior to seating, i.e., before fully torquing the bolt into place.

*Break-Loose Torque (BLT):* The initial torque reading obtained when a bolt is unscrewed after it has been seated, i.e., fully torqued into place.

*Break-Away Torque (BAT):* The initial torque reading obtained when a bolt is unscrewed after it has NOT been seated.

*Prevailing Out Torque (POT):* The maximum torque reading obtained when a bolt is being removed, excluding the BLT value; typically the value during the first full rotation of the bolt.

## OEM Approvals

3M™ Scotch-Grip™ Fastener Adhesive 2353 meets the requirements of IFI 125 and the following automotive specifications:

General Motors	6175M
Ford	ESA-M2G200-A ESS-M11P24-A2 WX-200 <sup>1</sup>
Chrysler	PF-6616 MS-CC76

<sup>1</sup> Except for 1 hour Break-Loose Torque values on M5 and M6 bolts; however, 2353 has been approved to the WX-200 specification.

## Health and Safety

**Health and Safety Information:** Read all Health Hazard, Precautionary, and First Aid statements found in the Material Safety Data Sheet (MSDS) and/or product label prior to handling or use. MSDSs are available on [www.3M.com](http://www.3M.com).

\*\* Performance tests are run using standard test procedures. The values presented are typical values not to be used for specification purposes.

**Important Notice to Purchaser:** All statements, technical information and recommendations herein are based on tests 3M believes to be reliable. 3M does not warrant or guarantee the accuracy or completeness of this information. UNLESS SPECIFICALLY STATED OTHERWISE IN THIS BROCHURE, THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PURPOSE: Seller's and manufacturer's only obligation shall be to replace such quantity of the 3M product proved to be defective. Before using, user shall determine the suitability of the 3M product for its intended use, and user shall assume all risk and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE, IN TORT, CONTRACT OR UNDER ANY OTHER LEGAL THEORY, FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL, OR CONSEQUENTIAL (INCLUDING, BUT NOT LIMITED TO, LOST PROFITS, OR REVENUES) ARISING OUT OF THE USE OF OR THE INABILITY TO USE OR IN ANY OTHER WAY RELATED TO THE PRODUCT. No statement or recommendation not contained herein shall have any force or effect unless contained in an agreement signed by officers or seller and manufacturer.



### Automotive Division

3M Center, Building 223-1S-02  
St. Paul, MN 55144-1000  
[www.3M.com/Scotch-Grip](http://www.3M.com/Scotch-Grip)



Minimum 10% Post Consumer Fiber  
Printed in USA  
© 3M 2004 75-3467-7173-8